

Semi-Flush/Convertible

 Ceiling/Chain mounted • Damp location listed **PROGRESS LED**


Description:

Simplified frame with updated styling and elegant etched glass shades. This semi flush fixture is convertible to a hanging fixture. Perfect for foyers, hall, bedrooms and closets. This fixture is LED for energy savings. It has 1276 lumens (source) with a 3000K color temperature. Complimented by a Antique Bronze finish.

Specifications:

- Antique Bronze (-020) (painted)
- Steel Construction
- Etched Glass Diffuser
- LED Module is replaceable (part # 93074039)
- Design highlights smart simplicity to complement today's home
- One light semi flush convertible
- Popular Antique Bronze finish
- Etched glass shades add distinction
- Features 17-watt integrated LED to deliver energy savings and reduce long-term maintenance costs
- 1276 lumens, 73 lumens per watt (source)
- 3000K color temperature, 90CRI
- ENERGY STAR certified
- California JA8 certified.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- Three feet of 9 gauge chain supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1276/73 (LM-82)
Lumens/LPW (Delivered)	1143/64.9 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

P350088-020-30

Images:



Dimensions:

Diameter: 12-7/8"
Height: 10-3/8"
Overall Ht. W/Chain: 50"

Glass
Width: 12-7/8"
Height: 3-7/8"

Photometrics:


P350088-020-30

ELECTRICAL DATA	P350088-020-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P350088-020-30

LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 1143
 Fixture Efficacy: 64.9
 Spacing Criteria: 1.24

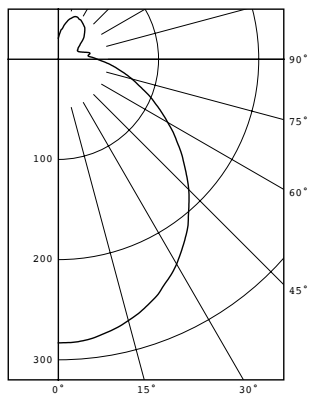

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	283	
5	282	27
15	270	76
25	249	115
35	220	138
45	184	142
55	145	130
65	108	107
75	76	80
85	50	55
90	39	
95	31	36
105	27	29
115	21	21
125	27	25
135	37	29
145	43	27
155	46	21
165	41	12
175	29	3
180	21	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	218	20.3
0-40	356	33.2
0-60	627	58.5
0-90	870	81.2
90-120	86	8.0
90-130	111	10.3
90-150	166	15.5
90-180	202	18.8
0-180	1072	100.0

Test 17.01617 Test Date 06/09/17

P350088-020-30

Dimming Notes:

P350088 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.