

## One-Light Pendant

 Ceiling cord mounted • Dry location listed **PROGRESS LED**


### P5094-0930K9

#### Description:

One-light LED industrial style warehouse cord-hung pendant with spun metal shade. Gloss white inside shade for reflectivity. 3000K, 90CRI, 1,211 lumens 71.2 lumens/watt per module (source).

#### Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- Spun metal shade, White acrylic diffuser
- LED Module is replaceable (part # 93053641)
- One-light LED industrial style warehouse cord-hung pendant.
- Spun metal shade.
- Gloss white inside shade for reflectivity.
- 3000K, 90CRI.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 10 feet of wire supplied
- ENERGY STAR® qualified

#### Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	788/50.5 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Dry location listed ENERGY STAR® qualified

#### Images:



#### Dimensions:

Diameter: 16"  
Height: 8"  
Overall Ht. W/Cord: 129"

Glass 2  
Width: 5-13/16"  
Length: 5-13/16"  
Height: 0-1/2"

**Photometrics:**

## P5094-0930K9

<b>ELECTRICAL DATA</b>	<b>P5094-0930K9</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

\*See Dimming Notes for more information

**P5094-0930K9**


LED Light Engine: 3000 K 90 CRI  
 System Wattage: 17  
 Fixture delivered lumens: 788  
 Fixture Efficacy: 50.5  
 Spacing Criteria: 1.2

**CANDELA DISTRIBUTION**

DEG	CANDELA	LUMENS
0	321	
5	319	30
15	304	86
25	280	129
35	246	154
45	212	163
55	155	138
65	62	64
75	16	17
85	6	7
90	0	

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	245	31.1
0-40	399	50.7
0-60	700	88.8
0-90	788	100.0
90-180	0	0.0
0-180	788	100.0

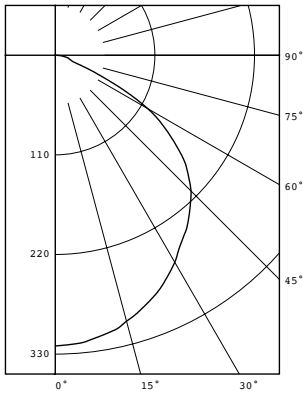

Test 9030 Test Date 05/12/14

## P5094-0930K9

### Dimming Notes:

---

P5094 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron	Nova T	NTELV-300
Lutron	Vierti	VTELV-600
Lutron	Maestro	MAELV-600
Lutron	spacer/system	SPSELV-600
Leviton	Renoir II	AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.